


DETAIL B
SCALE 2 : 1



(317) 346-4110
www.drainagesolutionsinc.com

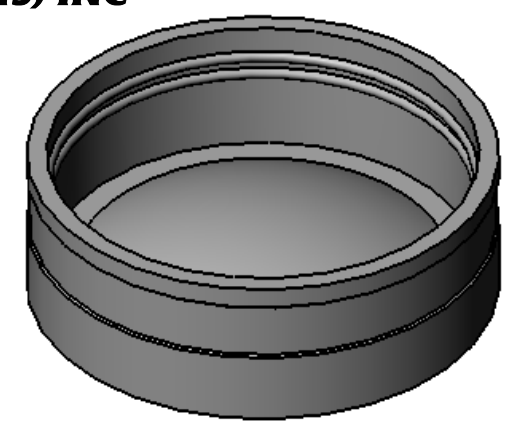

NOTES:
- SOME HIDDEN LINES NOT SHOWN
- BREAK ALL SHARP CORNERS
- REPORT ALL CHANGES TO ENGINEERING

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF FERNCO, INC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF FERNCO, INC. IS PROHIBITED.



300 S. DAYTON ST.
DAVISON, MI 48423
PH: 810-653-9626
FAX: 810-654-2616

| | |
|---------------------|-------------------|
| Part Weight | |
| Min/Max Temp. | -30/140 Degrees F |
| Pressure Tested | 4.3 PSI |
| Material | Flexible PVC |
| Installation Torque | 60" Lbs. |
| Conforms to ASTM | D5926 |
| Box Quantity | 40 |
| Clamps used | 300 Series |

TOLERANCES:
.X= Fractional ±
.XX= ±.02
.XXX= ±.030
ANG.= ±0.5°
UNLESS OTHERWISE SPECIFIED

UNITS: INCHES
SIZE: **A**
3RD ANGLE PROJECTION
DO NOT SCALE DRAWING

| | |
|--------------------------------|-----------------------|
| DESCRIPTION: Cap 4" Plastic | |
| QC-104 | |
| DESIGNER: D. Brady | SCALE not to scale |
| CHECKER: | DATE: 8/3/2007 |
| SHEET 1 OF 1 | |