

300 S. DAYTON ST. DAVISON, MI 48423 PH: 810-653-9626 FAX:810-654-2616

QT-200

Qwik Tee 2" x 2" x 2" Cast Iron, Plastic, Steel, Copper and Lead to the same



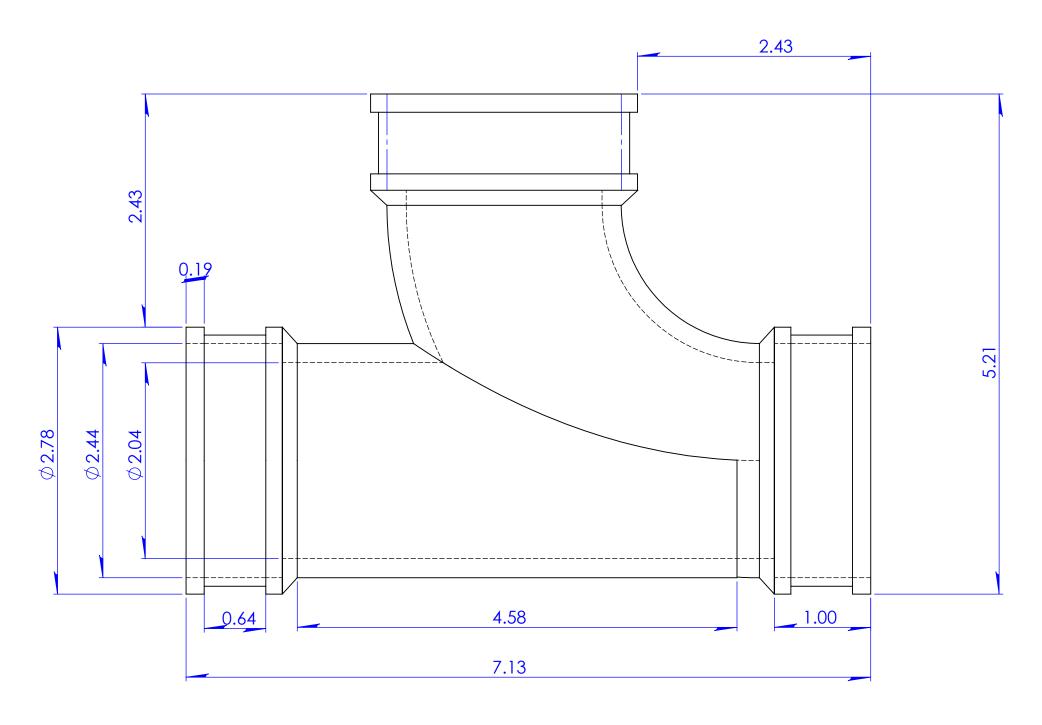

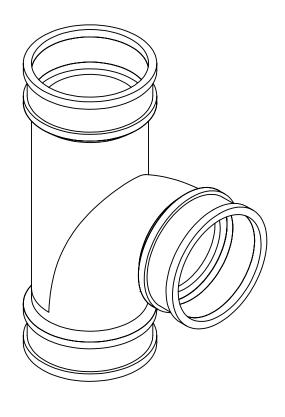

D. Brady

DATE:

(317) 346-4110 www.drainagesolutionsinc.com

6/8/2011

SCALE:

not to scale

SHEET 1 OF 1

PROPRIETARY AND CONFIDENTIAL THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF FERNCO, INC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF FERNCO, INC. IS PROHIBITED.

TOLERANCES:
.X= Fractional ±
.XX= ±.06
ANG.= ±3°
UNLESS OTHERWISE SPECIFIED

	Part Weight	0.88 lbs.	Installation Torque	60" Lbs.	units:	SIZE:	DESIGNER:
	Min/Max Temp.	-30/140 Degrees F	Conforms to ASTM	D5926	INCHES	A	
	Pressure Tested	4.3 PSI	Clamps used	300 Series	3RD ANGLE PROJECTION		CHECKER:
	Material	Flexible PVC 60 Duro Shore A	Box Quantity	20	DO NOT SCALE DRAWING		