


(317) 346-4110 www.drainagesolutionsinc.com





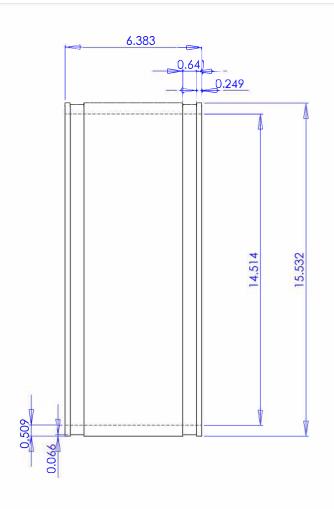

_*This Part requires two clamps, part number 248-300. See additional drawing for information on these clamps.

SOME FIDDEN LINES NOT BREAK ALL SHARP CORNERS -REPORT ALL CHANGES TO ENGINEERING

PROPRIETARY AND CONFIDENTIAL

THE INFORMATION CONTAINED IN TH DRAWING IS THE SOLE PROPERTY OF FERNCO, INC. ANY REPRODUCTION PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF FERNCO, IN IS PROHIBITED.

Part Weight	7.44 lbs.	TOLE
Min/Max Temp.	-30/140 Degrees F	.X= Fro
Pressure Tested	4.3 PSI	UNITS:
Material	Flexible PVC	
Installation Torque	60" Lbs.	
Conforms to ASTM	D5926, C1173	
Box Quantity	5	
Clamps used	300 Series	3RD ANGLE

TOLERANCES: .X= Fractional ± $.XX = \pm .02$ $.XXX = \pm .030$

ANG.= ±0.5° UNLESS OTHERWISE SPECIFIED

Coupling 12" Clay x 12" Clay

1001-1212

DESIGNER: D. Brady D ANGLE PROJECTION CHECKER: O NOT SCALE DRAWING

SCALE

not to scale 1/31/2007 SHEET 1 OF 1