

**NOTES:**

- Note 1: Contact your utility company prior to trenching. Consult a professional arborist if root trimming is required.
- Note 2: Install & Cover Biobarrier® as soon as possible (within 12 hours) after opening. High temperatures and direct sunlight can reduce effective product life.
- Note 3: Dig trenches a minimum of 4 in. wide for Typar® Biobarrier® Root Control Fabric. Trenches must be a minimum length of mature plant canopy plus (+) 10 ft. centered on the root source and adjacent to protection area.
- Note 4: Install Typar® Biobarrier® Root Control Fabric on the side of the trench opposite the root source.
- Note 5: Install Typar® Biobarrier® Root Control Fabric with Nodules facing toward root source.
- Note 6: Fixingpins should penetrate fabric between the nodules 1/4 in. from topedge of fabric and at a 45° angle to the trenchwall.

Specific advice on the use of Biobarrier® can be obtained from Polymer Group Inc.

**Table 1 : Biobarrier® Specifications**

Description	Data	
<b>Product</b>	Biobarrier® RootControlSystem	
<b>Chemical Family</b>	Thermoplastic Polyolefin	
<b>Composition</b>	Polypropylene	> 74.8%
	UV Stabilizer	< 5%
	Trifluralin	< 20%
	PigmentMasterbatch <sup>1</sup>	< 0.5%
<b>Appearance</b>	Gray Fabric	
<b>Physical State</b>	Solid	
<b>Vapor Pressure<sup>2</sup></b>	13.7mPa @ 25°C	
<b>Boiling Point</b>	Not Applicable	
<b>Solubility (H<sub>2</sub>O)<sup>2</sup></b>	0.2 ppm @ 25°C	
<b>Vapor Density</b>	Not Applicable	
<b>Packing Density</b>	Not Applicable	
<b>Odor</b>	Aromatic (Solvent)	
<b>pH</b>	Not Applicable	
<b>Evaporation Rate</b>	Not Applicable	
<b>Melting Point<sup>2</sup></b>	> 48.5°C	
<b>Specific Gravity</b>	0.88-0.99	
<b>Percent Volatiles</b>	Nil	
<b>UV resistance</b>	High	
<b>Corrosivity</b>	None	
<b>Flammability</b>	Non-Flammable	
<b>Toxicity</b>	IV	
<b>Hygroscopicity</b>	None	
<b>Explosivity</b>	None	
<b>Fabric</b>		
<b>Unit Weight</b>	4.0	
<b>Tensile Strength (lbs.)</b>	45.0	
<b>Elongation at Break (%)</b>	> 70.0	
<b>Mullen Burst Strength (psi)</b>	175.0	
<b>Puncture Strength (lbs.)</b>	50.0	
<b>Coefficient of Permeability (cm/sec.)</b>	3 x 10 <sup>2</sup>	
<b>Nodule</b>		
<b>Base Diameter (in.)</b>	7/16	
<b>Height</b>	1/4	
<b>Weight (oz.)</b>	0.013	
<b>Spacing (in.)</b>	1-1/2	
<sup>1</sup> Contains Carbon Black < 0.1%		
<sup>2</sup> Trifluralin (CAS # 1562-09-8)		
<sup>3</sup> Additional Information May Be Obtained From Polymer Group Inc. Upon Request		

**Chart 1: Examples of Intended Biobarrier® Root Control Applications & Roll Widths**


Application	Root Control Width in. (cm)					
	12 (30)	19.5 (50)	24 (61)	29 (74)	39 (99)	58.5 (149)
Building Foundations					X	X
Burial Vaults/Tombstones						X
Containers			X	X	X	X
Curbs		X	X			
Drain Lines	X	X	X	X	X	X
Earthdams						X
Golf Greens/Tees/Cart Paths		X	X	X	X	
Landfills						X
Medians			X	X	X	
Paths	X	X	X	X		
Planting Beds		X	X	X	X	X
Pot 'N' Pot			SOLD IN 6' X 12' SWATCHES (600/BOX)			
Pots	X	X				
Retaining Walls				X	X	X
Roads		X	X	X		
Roof Gardens					X	X
Septic Tanks/Fields						X
Sidewalks		X	X	X		
Swimming Pools		X	X	X	X	
Tennis Courts		X	X	X	X	
Underground Pipes/Cables	X	X	X	X	X	X
Underground Storage Tanks						X
Utility Substations		X	X	X	X	

**Biobarrier® Root Control is available in 20 ft. (6.1 m) or 100 ft. (30.5m) Roll Lengths**

Chart 1 is a general guide only. Your specific applications may require slightly different sizes. As a general rule, the greater the fabric width, the greater the degree of protection against root damage. But, like any other root barrier the protection does not extend beyond the edge of the fabric. So it's important to use adequate length and width to assure proper protection.

This field guide is provided as an aid to assessing root control in commonly encountered site conditions. Polymer Group Inc. accepts no responsibility for any loss or damage resulting from the use of this guide.

Please note that the information above is given as a guide only. All sizes and weights are nominal figures and may vary to what is published. Polymer Group Inc. cannot be liable for damage caused by incorrect installation of this product. Final determination of the suitability of any information or material for the use contemplated and the manner of its use is the sole responsibility of the user and the user must assume all risk and responsibility in connection therewith.

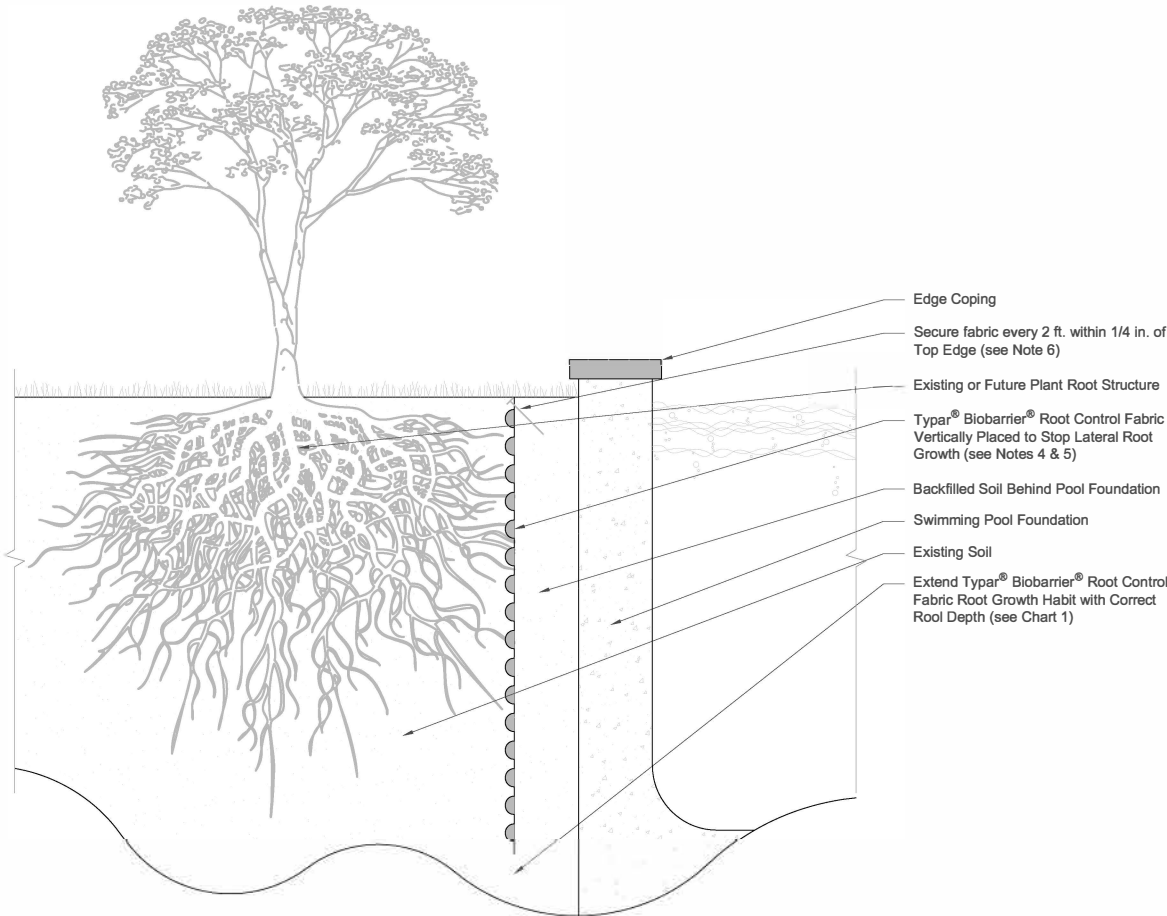

**Biobarrier® : Swimming Pool Application**  
Scale : N.T.S.



(317) 346-4110  
www.drainagesolutionsinc.com

**TYPAR Geosynthetics**  
70 Old Hickory Blvd. Old Hickory, TN 37138

**NOT FOR CONSTRUCTION**

Copyright © Polymer Group Inc. All rights reserved  
Typar® is a registered trademark of Polymer Group Inc.

**DISCLAIMER:**  
THE INFORMATION CONTAINED IN THIS DETAIL IS PROVIDED FOR THE CONVENIENCE OF THE USER AND DOES NOT TAKE PLACE OF CONSTRUCTION PLANS AND/OR SPECIFICATIONS. POLYMER GROUP INC. CANNOT BE HELD RESPONSIBLE FOR THE USE OR MISUSE OF THIS INFORMATION. WE RECOMMEND YOU CONTACT US FOR FURTHER DESIGN ASSISTANCE.  
THIS DETAIL IS FOR CONCEPT PURPOSES ONLY AND DOES NOT IMPLY ANY ACTUAL DESIGN OR ENGINEERING HAS BEEN COMPLETED. ENGINEERING MODELING WILL NEED TO BE PERFORMED TO DETERMINE PROPER HYDROLOGICAL AND STRUCTURAL REQUIREMENTS AND COMPONENTS INCLUDING SAND AND AGGREGATE. ALL MATERIALS ARE SUBJECT TO APPROVAL BY POLYMER GROUP, INC.

**Biobarrier® Root Control Fabric**  
*For Swimming Pool Applications*

Specification, Design & Installation Guide