

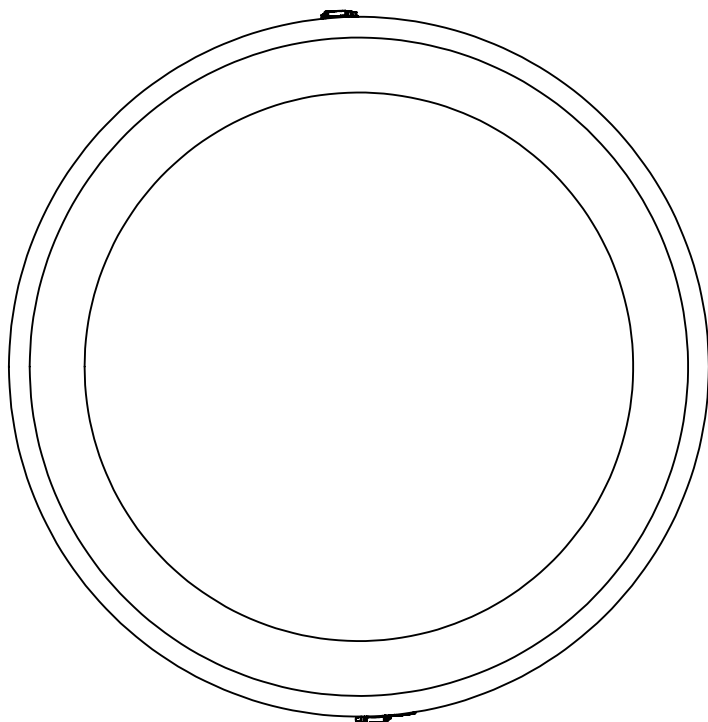


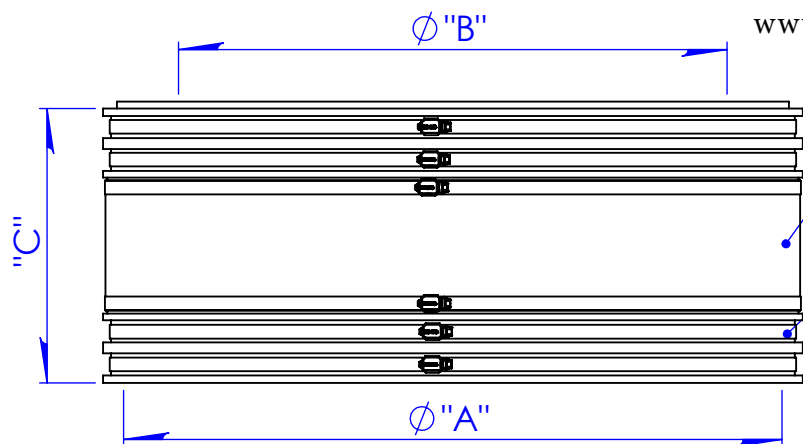

**DRAINAGE
SOLUTIONS, INC**

(317) 346-4110

www.drainagesolutionsinc.com

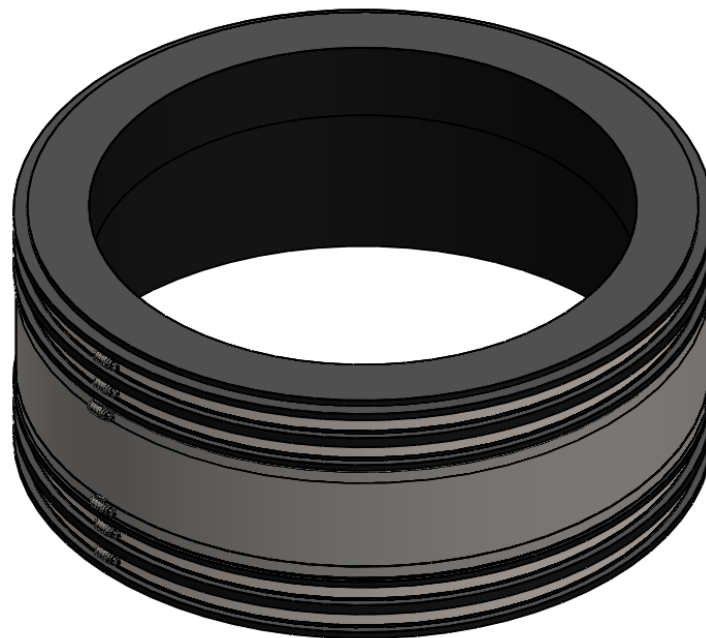

300SS Shield
High Torque
Clamps 2pcs.

High Torque Clamps
4 Locations
* Equipped with 2
HT Clamps

Designed for Gravity Flow Sewer and Storm Water Systems

Part Number	"A"	"B"	"C"
*1070-1010HTRC	11.6	10.5	6.0
*1070-10-8HTRC	11.6	8.4	6.0
1070-12-8HTRC	14.4	8.4	10.0
1070-1210HTRC	14.4	10.5	10.0
1070-1212HTRC	14.4	12.5	10.0
1070-1515HTRC	17.7	15.3	10.0
1070-1818HTRC	21.3	18.7	10.0
1070-2424HTRC	28.1	24.8	10.0
1070-3030HTRC	35.4	31.5	10.0
1070-3636HTRC	41.6	39.4	10.0
1070-4242HTRC	47.7	44.5	10.0
1070-4848HTRC	54.1	50.8	10.0

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED
IN THIS DRAWING IS THE SOLE
PROPERTY OF FERNCO, INC.
ANY REPRODUCTION IN PART OR
AS A WHOLE WITHOUT THE
WRITTEN PERMISSION OF FERNCO,
INC. IS PROHIBITED.

TOLERANCES:

.X= $\pm .125$
ANG.= $\pm 3^\circ$
UNLESS OTHERWISE
SPECIFIED

Gasket Material: Black Plasticized PVC

Clamps: 300 SS HT

Shield: 300SS, .012" x 4.88"

Installation Torque: Coupling 120 in-lbs, Shield 60 in-lbs

Standards: ASTM D5926

UNITS:

INCHES

SIZE:

A

DESIGNER:

T. Dipzinsk

CHECKER:

DATE:

19Jul13

SCALE:

not to scale

SHEET 1 OF 1