

BEFORE YOU BEGIN


Infiltrator Water Technologies' tanks must be installed according to state and/or local regulations and approvals, which supersede the manufacturer's installation instructions. If unsure of the installation requirements for a specific site, contact the health department or permitting authority. The IM- and CM-Series models referred to in this document include the IM-540, IM-1060, CM-1060, and IM-1530.

WARNING: IMPLOSIONS MAY CAUSE SERIOUS INJURY
Follow Infiltrator Water Technologies' vacuum test instructions


MATERIALS AND EQUIPMENT NEEDED	
<input type="checkbox"/> IM- or CM-Series tank	<input type="checkbox"/> Excavator
<input type="checkbox"/> Access port lid(s)*	<input type="checkbox"/> Shovel
<input type="checkbox"/> 10 screws per lid*	<input type="checkbox"/> Level
<input type="checkbox"/> 2 inlet/outlet gaskets (included)	<input type="checkbox"/> 5-inch-diameter (125 mm) hole saw
<input type="checkbox"/> Inlet/outlet tees*	<input type="checkbox"/> Utility knife
<input type="checkbox"/> Tape measure	<input type="checkbox"/> PVC pipe glue with primer
<input type="checkbox"/> Pipe, risers, etc.	
<input type="checkbox"/> Socket wrench	*tee and lid inclusion varies by state/province

- INSTALLATION SITE SELECTION**
- Do not install the tank in vehicular traffic areas. The tank is designed for non-traffic applications.
 - The allowable soil cover depth is 6 to 48* inches (150 to 1,200 mm).
*18-inch (450 mm) max. in Florida for Cat. 3 tanks; 48-inch (1,200 mm) max. in Florida for Cat. 4 tanks; and 36-inch (900 mm) max. in Massachusetts, New Hampshire, North Carolina, and Oregon.
 - The tank shall not be installed where the subsurface water level outside the tank exceeds the height of the outlet pipe saddle. See page 4 illustration. See installation terminology on page 4 for Indiana installations.


- EXCAVATING AND PREPARING THE SITE**
- Unless buoyancy control measures are required, the excavation width and length should be 18 to 36 inches (450 to 900 mm) larger than the tank on each side or sized as necessary to ensure proper backfill compaction, as outlined in Steps 5-10 of "Backfilling the Tank" in this document. See Infiltrator IM- and CM-Series Tank Buoyancy Control Guidance document, available online at www.infiltratorwater.com, for specific excavation requirements when installing with buoyancy control measures.
 - Excavation depth shall account for the 55-inch (1,375 mm) tank height. Also account for 4 inches (100 mm) of bedding (if required) and cover depth (permissible cover depth is 0.5 to 4 feet (150 to 1,200 mm) of soil).
Note: If the water level outside the tank exceeds the height of the outlet pipe saddle, tank structural integrity may be compromised. See page 4 for maximum allowable subsurface water elevation guidelines. See page 4 note. Indiana Installations: If the depth of the uninterrupted saturated soil conditions cannot be determined from the site soil evaluation report or other site-related data and other information indicates the possible presence of a perched ground water table, tank installation is permissible. See installation terminology on page 4.
 - Inspect bottom of excavation to verify suitability of native soil for tank installation. Soils with large, protruding, or sharp stones or other similar objects that may damage the tank are not suitable.
 - The tank may be installed either in suitable native soil (see Backfilling the Tank section) or a minimum 4-inch (100 mm) layer of well-graded granular soil having particles less than 3 inches (75 mm) in diameter, or maximum 0.5-inch (13 mm) diameter crushed stone.
 - Create a uniform, compacted, level surface to ensure that the bottom of the tank is evenly supported. Verify that the installation surface is flat.

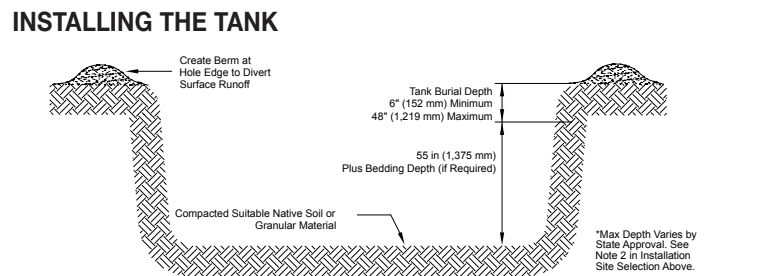


- Inspect the tank for damage before installation.
- If the tank inlet and outlet penetrations are not drilled, drill holes using the drill points provided at each of the inlet and outlet ports according to Table 3 in the Inlet and Outlet Hole Locations section. The inlet and outlet may be drilled on either the sides or ends of the tank, as required based on applicable codes and site conditions.*
* Kentucky and West Virginia tanks are factory-drilled. Florida and Oregon tanks must be factory- or distributor-drilled.
- The gaskets supplied with the tank are compatible with Schedule 40 and SDR 35 pipe using a 5-inch-diameter (125 mm) hole saw.
- Install the rubber gaskets at the inlet and outlet.
- Using all four of the tank's integral lifting lugs, lower tank into excavation.
- Slide the inlet and outlet pipes* through the gaskets. Soapy lubricant may be used to slide the pipe in.
*For North Carolina, the inlet pipe shall be a straight pipe with no tee.
- Horizontally position the tee 1½ inches (38 mm) from the access port rim, allowing the tee to fit into the recess in the access port lid (see detail).
- Install lids and risers (see Installing Risers section) as necessary. Rotate lid over access opening until it indexes to tank and drops into position.

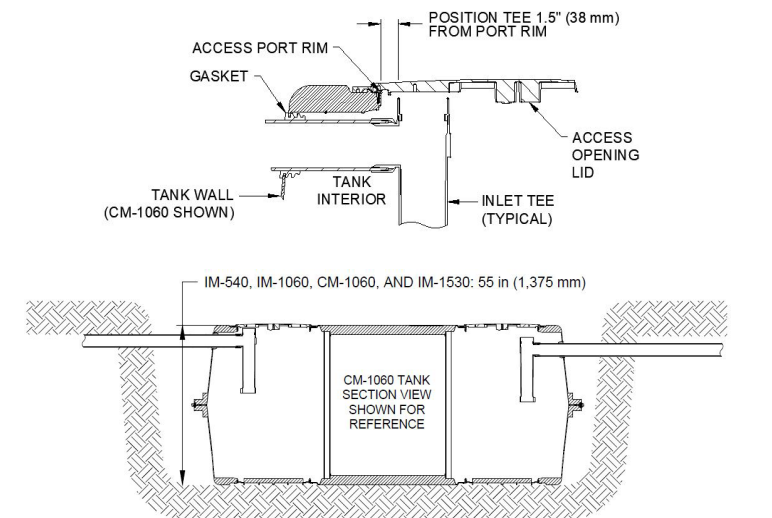

- BACKFILLING THE TANK**
- Note: Infiltrator tanks do not require filling with water prior to backfill placement. Water filling and backfilling to the tank mid-height is required if the tank is left in either an open or backfilled excavation that may fill with water from rain or other sources.**
- Backfill with suitable native soil (max. 3-inch (75-mm) stone diameter). If native soil is unsuitable, replace unsuitable fraction with suitable soil. If suitable soil is not locally available, contact Infiltrator for assistance.
 - Suitable soil shall include soil textural classes defined in the United States Department of Agriculture soil triangle.
 - For a tank soil cover depth of 0.5 to 2.0 feet (150 to 600 mm), suitable soil textures include:

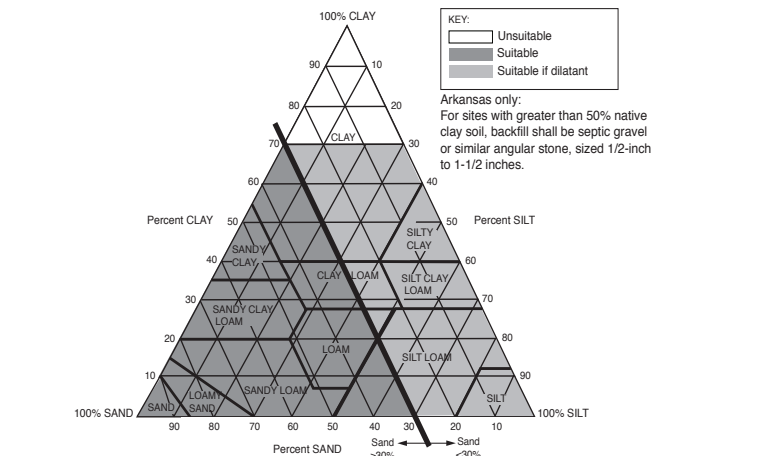

- and interceptor trenches may be sensible if the site is amenable to construction of a control system and such systems are not prohibited by regulation or law, and the tank location is not subject to flooding. Underdrains and groundwater interceptor trenches may prevent the need for tank buoyancy control measures.

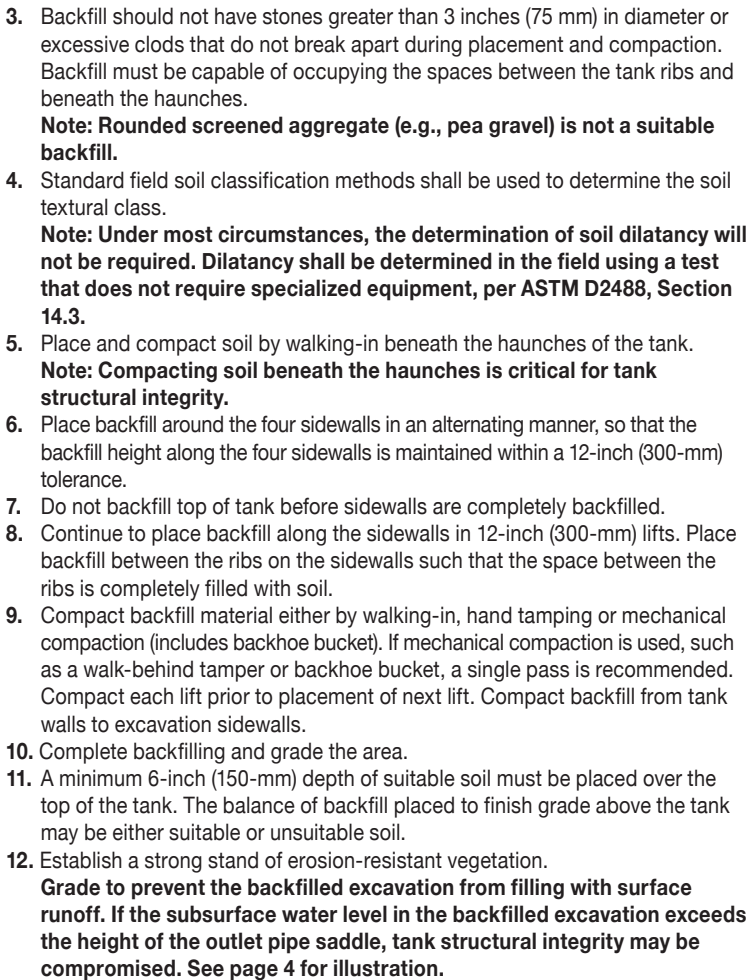

INSTALLING UNDER SHALLOW GROUNDWATER CONDITIONS

Table 1: Tank models¹ and conditions requiring buoyancy control²

1. IM-540, IM-1060, CM-1060 and IM-1530.
2. See Infiltrator IM- and CM-Series Tank Buoyancy Control Guidance document for detailed information on the use of controls.
3. No controls are required for soil cover depths exceeding 12 in (300 mm).
4. The tank shall not be installed where uninterrupted saturated soil conditions could be present from the tank bottom to a height above that of the outlet pipe saddle. See page 4 illustration. For Indiana installations, if the depth of the uninterrupted saturated soil conditions cannot be determined from the site soil evaluation report or other site-related data and other information indicates the possible presence of a perched ground water table, no buoyancy controls are required. See installation terminology on page 4.

INSTALLING RISERS

- ## INSTALLING PUMPS AND RELATED EQUIPMENT

Pumps may be supported on a stable, level 16x16-inch (400x400-mm) platform positioned on the bottom of the tank. One 16x16-inch block or two 8x16-inch (200-mm x 400-mm) side-by-side blocks may be used. Limit block height to account for pump height and liquid levels during pump cycles. Block(s) should be placed below an access opening and level upon the tank bottom. For two blocks, orient them perpendicular to ribs on the tank bottom, if present, for stability.

Installation of products such as electrical conduit and wiring, pumps, water level control equipment, valves, siphon equipment, etc. shall be in accordance with the product manufacturer's instructions and compliant with applicable state or local rules and regulations. Apurtenances shall be fastened to the tank riser system and not the tank body or access opening rim. Where possible, apurtenances shall be installed to facilitate maintenance and repair access via the tank access openings.

GENERAL SPECIFICATIONS

- 2

Table 2: Nominal Volume Chart

Liquid height above tank bottom ¹		Liquid volume in tank at indicated height (measured from tank bottom to liquid surface) ¹							
		IM-540		IM-1060		CM-1060		IM-1530	
		U.S. Gal	Liters	U.S. Gal	Liters	U.S. Gal	Liters	U.S. Gal	Liters
1	3	3	11	3	11	5	21	17	64
2	5	8	30	13	49	17	64	34	128
3	8	14	53	28	106	31	119	51	192
4	10	21	80	46	174	50	188	68	256
5	13	29	109	65	246	70	263	94	357
6	15	37	141	86	326	91	344	122	463
7	18	46	173	107	405	113	429	152	573
8	20	55	207	129	488	137	517	180	681
9	23	64	243	152	575	160	608	212	802
10	25	74	279	176	666	185	700	245	928
11	28	84	317	200	757	210	795	280	1,061
12	30	94	356	225	852	236	892	312	1,182
13	33	105	396	251	950	262	991	351	1,328
14	36	116	437	277	1,049	288	1,091	387	1,463
15	38	127	480	303	1,147	315	1,192	422	1,597
16	41	138	523	330	1,249	342	1,293	464	1,756
17	43	150	566	357	1,351	369	1,396	500	1,892
18	46	161	611	384	1,454	396	1,499	537	2,034
19	48	173	656	411	1,556	423	1,602	575	2,177
20	51	186	702	438	1,658	451	1,706	614	2,322
21	53	198	749	465	1,760	478	1,811	652	2,468
22	56	210	796	493	1,866	506	1,916	690	2,612
23	58	223	843	521	1,972	534	2,022	729	2,758
24	61	235	891	549	2,078	562	2,129	770	2,914
25	64	248	940	577	2,184	591	2,236	808	3,058
26	66	261	988	605	2,290	619	2,344	847	3,208
27	69	274	1,038	633	2,396	648	2,453	887	3,356
28	71	287	1,088	662	2,506	677	2,563	928	3,513
29	74	300	1,137	691	2,616	706	2,671	968	3,665
30	76	313	1,185	719	2,722	734	2,778	1,007	3,814
31	79	326	1,233	747	2,828	762	2,885	1,048	3,966
32	81	338	1,281	775	2,934	790	2,991	1,087	4,113
33	84	351	1,328	802	3,036	818	3,096	1,126	4,262
34	86	363	1,375	830	3,142	846	3,201	1,165	4,410
35	89	375	1,421	857	3,244	873	3,305	1,204	4,557
36	91	387	1,466	884	3,346	901	3,409	1,242	4,701
37	94	399	1,511	911	3,449	928	3,512	1,280	4,846
38	97	411	1,555	938	3,551	955	3,614	1,318	4,988
39	99	422	1,598	965	3,653	982	3,716	1,355	5,131
40	102	433	1,640	992	3,755	1,008	3,817	1,393	5,272
41	104	444	1,681	1,018	3,854	1,035	3,917	1,430	5,412
42	107	455	1,722	1,044	3,952	1,061	4,016	1,466	5,550
43	109	465	1,761	1,069	4,047	1,087	4,113	1,502	5,685
44	112	475	1,799	1,094	4,141	1,111	4,207	1,537	5,817
45	114	485	1,836	1,118	4,232	1,136	4,302	1,572	5,950
46	117	494	1,871	1,142	4,323	1,160	4,393	1,604	6,070
47	119	503	1,905	1,165	4,410	1,184	4,481	1,638	6,201
48	122	512	1,938	1,187	4,493	1,206	4,566	1,667	6,310
49	124	520	1,970	1,208	4,573	1,228	4,648	1,697	6,422
50	127	528	1,999	1,228	4,648	1,248	4,724	1,724	6,527
51	130	535	2,027	1,247	4,720	1,267	4,794	1,749	6,621
52	132	542	2,050	1,265	4,789	1,282	4,851	1,766	6,684
53	135	547	2,071	1,278	4,838	1,293	4,896	1,777	6,726
54	137	551 ²	2,087	1,287	4,872	1,300 ²	4,922	1,785 ²	6,758

1. Liquid height measured from lowermost inside surface at bottom of corrugation in tank to the liquid surface elevation.

2. The total capacity of the IM-540 tank is 552 gallons; the total capacity of the CM-1060 is 1,309, the total capacity of the IM-1530 tank is 1,787 gallons.

3. To determine liquid volume between liquid heights, subtract the Table 2 volume indicated for the upper and lower heights. Example: CM-1060 volume between 50 in (127 cm) and 40 in (102 cm) = 1,248 gal (4,724 L) - 1,008 gal (3,817 L) = 240 gal (907 L).

INLET AND OUTLET HOLE LOCATIONS

Drill height marks are provided on all Infiltrator tank models to guide inlet and outlet hole drilling. A single drill height mark is provided at each end or side port on tanks (example illustrated below). Holes may be drilled at the end or side inlet and outlet locations, as allowed by state and/or local regulations. The drill height mark indicates the center point location

for the hole saw. The pilot drill bit on the hole saw should be positioned at the center of the drill height mark to align the hole saw properly. Table 3 provides drilling and invert information by regulatory jurisdiction for the installation of 4-inch-diameter (100 mm) pipe.

Table 3: Inlet and Outlet Hole Locations¹

Jurisdiction ²	Inlet Drill Location	Outlet Drill Location	Invert Drop (in) [mm]	Inlet Invert Height (in) [mm]		Outlet Invert Height ³ and Liquid Level (in) [mm]
				Above Inside Bottom of Tank ³	Above Excavation Base ⁴	
IM-540 and IM-1530						
All	All	All	3.00 [76]	47.00 [1,194]	47.20 [1,199]	44.00 [1,118]
CM-1060						
All Except Florida	All	All	3.00 [76]	47.00 [1,194]	47.20 [1,199]	44.00 [1,118]
Florida	End	End	2.00 [51]	46.00 [1,168]	46.20 [1,174]	44.00 [1,118]
IM-1060						
All	End	End	3.00 [76]	47.00 [1,194]	47.20 [1,199]	44.00 [1,118]
	Side	Side	3.00 [76]	47.50 [1,207]	47.70 [1,212]	44.50 [1,130]
	Side	End	3.50 [89]	47.50 [1,207]	47.70 [1,212]	44.00 [1,118]
	End	Side	2.50 [64]	47.00 [1,194]	47.20 [1,199]	44.50 [1,130]


1. State, provincial, and local regulatory requirements supersede Table 3 information.

2. Kentucky and West Virginia tanks are factory-drilled. Florida and Oregon tanks must be factory- or distributor-drilled.

3. Invert heights are measured from the lowest interior surface at the bottom of the tank to the invert.

4. Invert heights are measured from the base of the excavation to the invert.

Limitations When Subsurface Water is Present Above the Tank Bottom

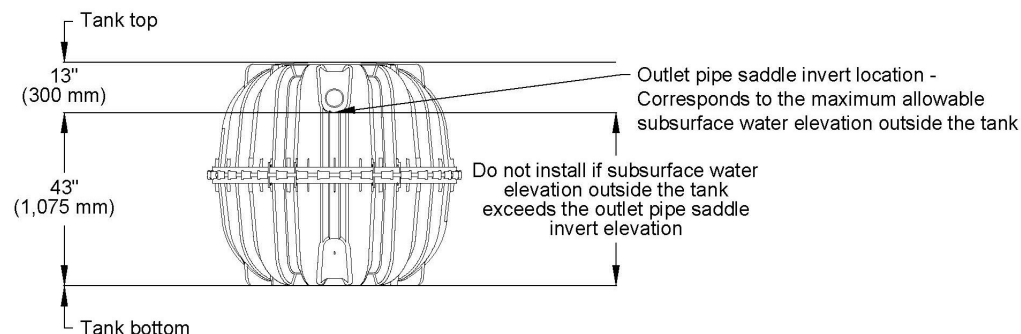

Installation Terminology

1. "Subsurface water" refers to a water-saturated zone of soil. Do not install if subsurface water is continuous from the tank bottom elevation to any point above the outlet pipe saddle elevation.

2. "Uninterrupted saturated soil" refers to water-saturated soil with no gaps in the saturated condition. An example of a gap in the saturated condition is a perched water table, when two water-saturated soil zones are interrupted by an unsaturated soil zone. Do not install if uninterrupted saturated soil is present from the tank bottom elevation to any point above the outlet pipe saddle elevation.

3. A perched water table is allowable above the outlet pipe saddle elevation only if unsaturated soil is present between the perched water table and tank bottom elevation.

Infiltrator Water Technologies, LLC ("Infiltrator")

INFILTRATOR® SEPTIC TANK LIMITED WARRANTY FIVE (5) YEAR MATERIALS AND WORKMANSHIP LIMITED WARRANTY

- (a) This limited warranty is extended to the end user of an Infiltrator Tank. A Tank manufactured by Infiltrator, when installed and operated in accordance with Infiltrator's installation instructions and local regulation by a person or company that is properly qualified to install the Infiltrator Tank in accordance with applicable state and/or local requirements, is warranted to you: (i) against defective materials and workmanship for five (5) years after installation. Infiltrator will, at its option, (i) repair the defective product or (ii) replace the defective materials. Infiltrator's liability specifically excludes the cost of removal and/or installation of the Tank.
- (b) In order to exercise its warranty rights, you must notify Infiltrator in writing at its corporate headquarters in Old Saybrook, Connecticut within fifteen (15) days of the alleged defect.
- (c) YOUR EXCLUSIVE REMEDY WITH RESPECT TO ANY AND ALL LOSSES OR DAMAGES RESULTING FROM ANY CAUSE WHATSOEVER SHALL BE SPECIFIED IN SUBPARAGRAPH (a) ABOVE. INFILTRATOR SHALL IN NO EVENT BE LIABLE FOR ANY CONSEQUENTIAL OR INCIDENTAL DAMAGES OF ANY KIND, HOWEVER OCCASIONED, WHETHER BY NEGLIGENCE OR OTHERWISE. SOME STATES DO NOT ALLOW THE EXCLUSION OR LIMITATION OF INCIDENTAL OR CONSEQUENTIAL DAMAGES, SO THIS LIMITATION OR EXCLUSION MAY NOT APPLY TO YOU. THIS WARRANTY GIVES YOU SPECIFIC LEGAL RIGHTS AND YOU MAY ALSO HAVE OTHER RIGHTS WHICH VARY FROM STATE TO STATE.
- (d) THIS LIMITED WARRANTY IS THE EXCLUSIVE WARRANTY GIVEN BY INFILTRATOR AND SUPERSEDES ANY PRIOR, CONTRARY, ADDITIONAL, OR SUBSEQUENT REPRESENTATIONS, WHETHER ORAL OR WRITTEN. INFILTRATOR DISCLAIMS AND EXCLUDES TO THE GREATEST EXTENT ALLOWED BY LAW ALL OTHER WARRANTIES, WHETHER EXPRESS OR IMPLIED, OR STATUTORY, INCLUDING ANY WARRANTY OF MERCHANTABILITY, FINESSE FOR A PARTICULAR PURPOSE AND ANY IMPLIED WARRANTIES OTHERWISE ARISING FROM COURSE OF DEALING, COURSE OF PERFORMANCE, OR USAGE OF TRADE. NO PERSON (INCLUDING ANY EMPLOYEE, AGENT, DEALER, OR REPRESENTATIVE) IS AUTHORIZED TO MAKE ANY REPRESENTATION OR WARRANTY CONCERNING THIS PRODUCT, EXCEPT TO REFER YOU TO THIS LIMITED WARRANTY. EXCEPT AS EXPRESSLY SET FORTH HEREIN, THIS WARRANTY IS NOT A WARRANTY OF FUTURE PERFORMANCE, BUT ONLY A WARRANTY TO REPAIR OR REPLACE.
- (e) YOU MAY ASSIGN THIS LIMITED WARRANTY TO A SUBSEQUENT PURCHASER OF YOUR HOME.
- (f) NO REPRESENTATIVE OF INFILTRATOR HAS THE AUTHORITY TO CHANGE THIS LIMITED WARRANTY IN ANY MANNER WHATSOEVER, OR TO EXTEND THIS LIMITED WARRANTY.
- (g) NO WARRANTY OF ANY KIND IS MADE WITH REGARD TO ANY PRODUCT, COMPONENTS, DEVICES, MEDIA OR TREATMENT UNITS WHICH ARE MANUFACTURED BY OTHERS AND ARE INSTALLED IN AN INFILTRATOR TANK. USE OF THESE PRODUCTS ARE AT YOUR OWN RISK.
- (h) THE INFILTRATOR TANK IS DESIGNED TO BE BURIED UNDERGROUND. NO WARRANTY OF ANY KIND IS MADE IF YOUR TANK IS NOT BURIED UNDERGROUND AS SPECIFIED IN THE PRODUCT'S INSTALLATION INSTRUCTIONS.

CONDITIONS AND EXCLUSIONS

There are certain conditions or applications over which Infiltrator has no control. Defects or problems as a result of such conditions or applications are not the responsibility of Infiltrator and are NOT covered under this warranty. They include failure to install the Tank in accordance with instructions or applicable regulatory requirements or guidance, altering the Tank contrary to the installation instructions and disposing of chemicals or other materials contrary to normal tank usage.

The above represents the Standard Limited Warranty offered by Infiltrator. A limited number of regulatory jurisdictions have different warranty requirements. Any purchaser of a Tank should contact Infiltrator's corporate headquarters in Old Saybrook, Connecticut, prior to such purchase to obtain a copy of the applicable warranty, and should carefully read that warranty prior to the purchase of a Tank.



4 Business Park Road
P.O. Box 768
Old Saybrook, CT 06475
860-577-7000 • Fax 860-577-7001
1-800-221-4436
www.infiltratorwater.com
info@infiltratorwater.com

Distributed By:



(317) 346-4110
www.drainagesolutionsinc.com

Note: Please visit www.infiltratorwater.com for updated and/or amended instructional material.

U.S. Patents: 8322948; 8337119; 8297880; 7914230; 7008138. Other patents pending. Infiltrator, Quick4 and EZflow are registered trademarks of Infiltrator Water Technologies. Infiltrator Water Technologies is a wholly-owned subsidiary of Advanced Drainage Systems, Inc. (ADS).

© 2022 Infiltrator Water Technologies, LLC. Not responsible for any typographic errors. Printed in U.S.A.

TANK01 0422