

Flo-Well

Manufactured Dry Well



DRAINAGE SOLUTIONS, INC.
SUPPLIER / DISTRIBUTOR

(317) 346-4110

www.drainagesolutionsinc.com


LEED credits:

Make your
site green

Retains storm
water on-site

Less costly to
install than pipe
or concrete


Expands to
manage large
volumes of water

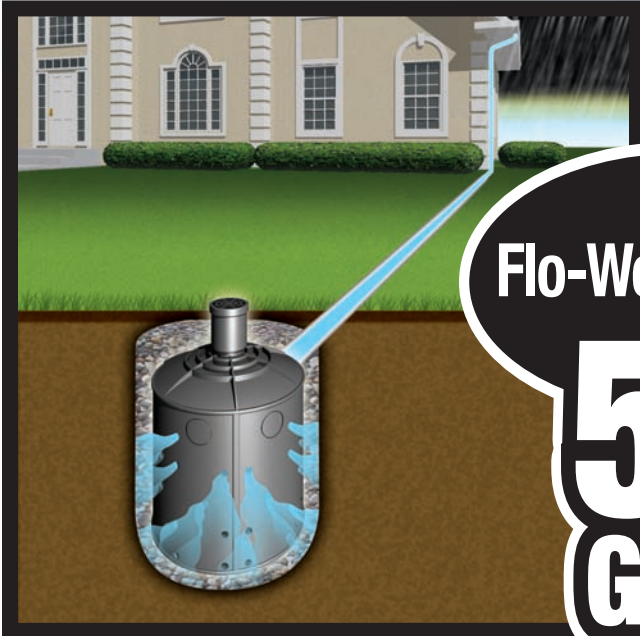

Flo-Well. HOLDS

**50
GAL.**

VERSUS

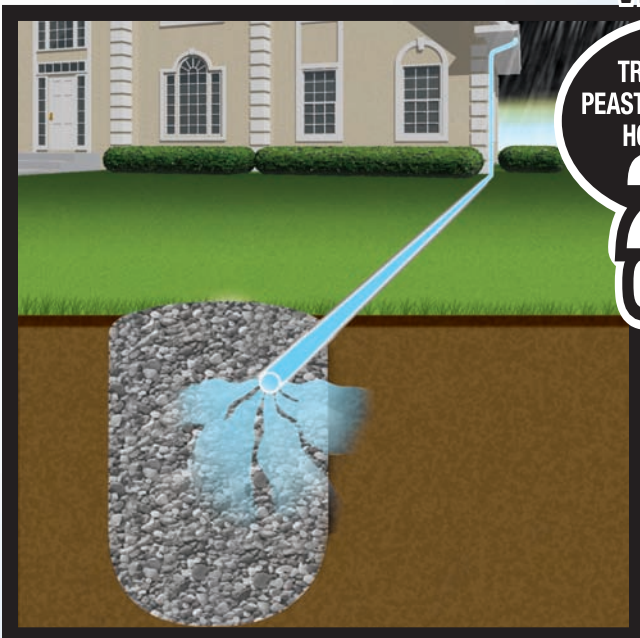

TRADITIONAL
PEASTONE DRYWELL
HOLDS ONLY

**20
GAL.**



Flo-Well[®] Manufactured Dry Well

	Part No.	Description	Color	Pkg. Qty.	Wt. Ea. (lbs.)	Product Class	Specifications
	FWAS24	24" diam. x 28.75"H Flo-Well [®] Storm water leaching system Includes 3 side panels, 1 Top Component Fits 4" SCH-40 Pipe and 4" DWV Pipe	Black	1	25.15	10FW	NDS #FWAS24 structural foam polyolefin round drywell system with UV inhibitors. 24" dia., 28.75" high, 49 gal. with 18- 1.5" Knockout leaching ports and 3- 4.5" knockout inlet/outlet ports per panel.
	FWAS24C	24" diam. Flo-Well [®] Cover Use with #FWAS24	Black	2	8.00	10FW	NDS#FWAS24C structural foam polyolefin round drywell system cover with UV inhibitors. 24 1/4" dia., 4 5/8" height, 3/4" outer lip, 4.5" center knockout fits NDS #FWAS24, NDS #FWSPS3.
	FWSPS3	Flo-Well [®] Side Panels/ Extension Only Includes 3 side panels; makes 1 round drywell. Fits #FWAS24 (May also be used as a durable compost bin.)	Black	1	5.00	10FW	NDS #FWSPS3 structural foam polyolefin side panels with UV inhibitors with 18- 1 1/2" knockout leaching ports and 3- 4.5" knockout inlet/outlet ports per panel. 24" high with recessed .75" lip for firm stacking.
	FWBP24	24" diam. Flo-Well [®] Bottom Fits #FWAS24	Black	5	3.50	10FW	NDS #FWBP24 structural foam polyolefin round Flo-Well [®] bottom with UV inhibitors. 24" diameter with six 1 1/2" leaching ports. 4.5" center knockout for strut coupling.
	FWSD69	4" SCH40 Surface Drain Inlet with Grate Fits #FWAS24 and #FWAS24C ADA Compliant	Black	8	1.85	10FW	NDS #FWSD69 structural foam polyolefin 6" grate with 4" inlet with UV inhibitors. 6" Diameter at inlet. 9" high. 4.5" OD fits Sch. 40 PVC fittings.
	FWFF67	Porous Filter Fabric Wrap for Flo-Well [®] Use with #FWAS24	Black	20	0.35	10FW	7' long x 2' wide to surround Flo-Well [®] Drywell System. Non-woven fabric. Weight 1 oz. Mullen burst 175 psi. 200 GPM flow through.